




TECHNICAL DATA SHEET

Autobahn Ceramic i3+ Window Film unlocks the next level in Nano-Ceramic Technology. Featuring an advanced, multi-layer construction, Autobahn Ceramic i3+ is designed to reject the maximum amount of solar energy and increase interior comfort levels. Autobahn Ceramic i3+'s durable, multi-layer construction ensures the product won't fade or discolor over time. Additionally, Autobahn Ceramic i3+'s Lifetime Warranty provides long-lasting protection, backed by a commitment to quality and customer satisfaction.

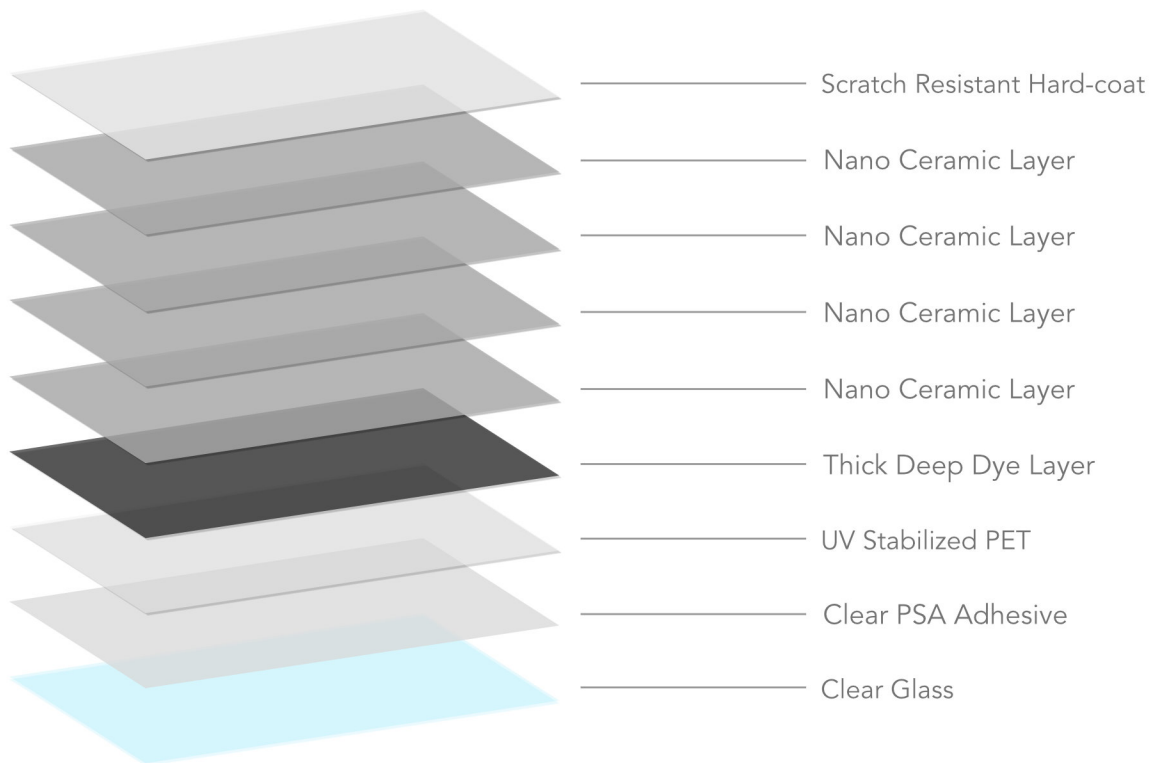

Product Characteristics

Product	VLT	Visible light reflectance	Shading Coefficient (SC)	Solar Absorption	Total Solar Energy Rejected	UV Rejection	IRR (1025 nm)	Glare Reduction	Adhesive Type	Thickness	Liner Orientation
Ceramic i3+ 05	5%	6%	0.30	91%	74%	>99%	99%	95%	PSA	2 Mil	Out
Ceramic i3+ 15	15%	6%	0.35	88%	70%	>99%	99%	89%	PSA	2 Mil	Out
Ceramic i3+ 30	32%	7%	0.42	76%	64%	>99%	99%	64%	PSA	2 Mil	Out
Ceramic i3+ 40	42%	7%	0.46	75%	62%	>99%	99%	54%	PSA	2 Mil	Out